

19/518774

Rec'd PCT/PTO 17 DEC 2002

PCT/EP 03 / 0 6 0 2 2

#2




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

10 JUN 2003

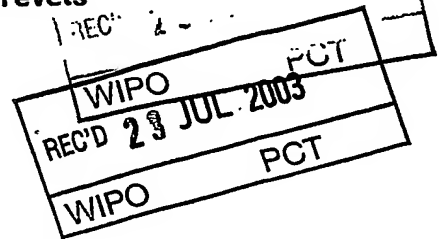

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02013803.8

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

Anmeldung Nr:  
Application no.: 02013803.8  
Demande no:

Anmeldetag:  
Date of filing: 21.06.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

NESTEC S.A.  
Avenue Nestlé 55  
CH-1800 Vevey  
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and device for liquefying of a powdery or pasty fat based product  
particularly in the production of chocolate and the like

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

A23G/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

**Method and device for liquefying of a powdery or pasty fat based product particularly in the production of chocolate and the like**

6        The present invention relates to a method and device for liquefying of a fat based mixture. The invention is particularly useful to replace or at least significantly shorten the traditional conching of fat based mixtures carried out in the chocolate making process.

10        In the traditional manufacture of chocolate or chocolate-like compounds, finely ground powders are dispersed in a continuous fat phase. The powders found in chocolate or chocolate-like compounds are traditionally sugar, cocoa solids and/or milk solids. These are mixed in differing proportions together with cocoa butter and/or vegetable fats, milk fats and emulsifier(s), such as lecithin. Plain chocolate is obtained by mixing sugar, cocoa butter, optionally other fats, and cocoa mass. Milk  
15        chocolate contains fat and milk non-fat solids as additional ingredients. White chocolate contains milk fat and milk non-fat solids, sugar and cocoa butter and/or vegetable fat without the addition of the cocoa mass or cocoa powder. Chocolate compounds may also be produced by using alternative fats in place of or in conjunction with natural cocoa butter. Such alternative fats belong to three main  
20        categories which are cocoa butter equivalents (CBE), cocoa butter substitutes (CBS), cocoa butter replacers (CBR). Detailed discussions of these different types of alternative fats can be found in a variety of sources, see for example, Traitler, H. et al., Journal of the American Oil Chemists Society, 62(2), 417-21 (1985).

25        In the traditional chocolate production method, the chocolate ingredients are normally mixed and ground in a refiner or mill to sufficiently reduce particle size of solids. Then, the paste is conched at a temperature from 50 to 110°C for periods of time from a few hours to a few days depending on the type of product and the equipment used. The conched chocolate is then usually cooled after conching to set hard either without tempering or by tempering followed by cooling or allowing to  
30        stand for a suitable period of time.

Conching of the refined flakes is usually regarded as an essential production step for the development of the final texture of the chocolate. In the conching

operation, shearing created in the conche causes the breaking up of the agglomerates, which are usually solids particles sticking together by water bonds. Then, the solids particles are coated with the fat and the fat phase finally disperses throughout the chocolate mass. Conching may additionally change the flavour and remove unwanted  
5 volatile compounds such as water or acetic acids by evaporation.

Devices for conching a chocolate refined mass have been developed for decades based on the principle of producing high shear flow on the mass by rotary means such as stripping elements or vanes revolving along an inner surface of large containers. For instance, a device for conching is known from DE 39 18 813 which consists of  
10 three axis-parallel cylindrical upwardly open chambers. These are a central main chamber with a greater diameter and two lateral subsidiary chambers. The three chambers merge into one another thereby forming the conche container. Mixing tools are disposed in each chamber on driven shafts. In general, high shearing and compression are both formed between the moving stripping tool and the static surface  
15 of the chambers. Due to the size to surface volume ratio of the known conching systems, only a small amount of chocolate mass is sheared at one time. Even while providing high shearing flow, the transition of the chocolate flake to the desired finished rheology is a time consuming process. Furthermore, the industrial conching machines occupy a considerable floor space in the factory and hence, the capital cost  
20 of these machines is very high.

Therefore, the conche is very important in the chocolate making process however it is a very inefficient mixer. With conche mixing taking up to a day to achieve the desired texture and quality, it is both an energy intensive and time consuming part of the chocolate processing.

25 Furthermore, the viscosity of the fat based mass is critical to produce the correct final product weight. For that, fat plays an essential role as it is the main ingredient used to coat the solid particles, plastify them and finally liquefy the mass. As fat is one of the most expensive major ingredients, any reduction of the fat content for a same level of viscosity reduction provides a significant economical advantage.

30 Therefore, there is a need for a method that provides a quicker, more effective and less energy consuming way for reducing the viscosity of a previously refined fat based mass.

There is also a need for significantly reducing the residence time of the product in this processing stage while providing satisfactory rheological properties to the final compound.

5 There is further a need for a method that requires less floor occupation and is a continuous process which makes also changeovers between products easier.

There is further a need for a method that more efficiently lowers the viscosity of a fat based bulk material while making the best use of the amount of fat available to coat the solids with fat.

10 There is also a need for replacing the conching or at least reduce in conching the liquefying time and/or increase the loading or throughput of material in the conche.

There is also a need for a method that enables to reduce the amount of fat for essentially the same level of viscosity.

There is also a further need to provide a lower cost manufacturing process.

15 To attain these objects, the method is based on the principle that a fat based mixture comprising solids and fat that have been previously refined to a powdery or pasty mass can be submitted essentially to elongational flow in a manner effective to provide breaking up of the agglomerates and intimate interactions of the solids with the fat thereby resulting in the coating of the solids with the fat.

20 Therefore, the present invention has surprisingly found that the desired rheological attributes of a chocolate or chocolate-like mass can be achieved in a more effective way; i.e., the breaking up of agglomerates and pasting of the powdery fat based mass obtained much quicker and in a more economic manner, by applying an elongational flow as opposed to a predominant shear action on the confectionery mass as it has traditionally been done in a shear mixer such as a traditional conche.

25 For conching fat based solid masses, the known methods have all been by means of applying essentially shearing to the refined mass. As well known in fluids physics, shearing can readily be achieved by utilising the drag forces that exist within a fluid bounded by two relatively moving surfaces. Shearing in a conche is obtained by the drag forces that create between the rotor and the stator surface. Incidentally, the usual  
30 conches also produce some elongational flow between the wedge shaped end of the rotors and the surface of the containers. However, the elongational flow is carried out

in a marginal way and it only effects a small amount of the material at a time in the conche. The elongational flow refers to the coating of the particles with fat in which material is squeezed through or spread over a surface as referred in "Industrial Chocolate Manufacturing And Use", Third Edition, Edited by S.T. Beckett, Fig. 9.2, pages 156-159.

More preferably, according to the invention, a predominant elongational flow is achieved by forcing a flow of a fat based mixture, preferably refined but non-liquefied, through a plurality of flow constrictions positioned in parallel and/or series relative to said flow.

10 The flow constrictions may preferably be constituted of a plurality of holes provided in at least one die plate.

The number, average diameter and shape of the holes may be selected depending on factors such as degree of elongational flow required, throughput rates, back pressure, recipes and combinations thereof. Therefore, the holes of the die plate(s) preferably have an effective diameter of from 0.5 to 10 mm. The effective diameter is regarded as the smallest diameter as considered along the length of the hole which, in fact, controls the reduction of the viscosity. As a matter of fact, the smaller the diameter the thinner the mass becomes at the exit of the hole.

20 The number of holes in combination with the holes diameter also dictates the throughput rate. High throughput rates are achievable when the number of holes in the die plate preferably ranges of from 1 to 200 holes, even more preferably of from 10 to 100 holes in the preferred ranges of diameters defined. The die plate will be so sized to accommodate the number of holes and diameter range required for the intended result.

25 The longitudinal shape of the holes may be determined according to the back pressure required for feeding the mixture through the die plate. A wide variety of holes geometry may be used that may effect the back pressure and the elongational flow. Therefore, holes may form a tapered, parallel, flared profile or any combinations thereof, as viewed from the inlet to the outlet of the holes. The diameter of the holes may be adjusted to advantageously reduce the generated back pressure and to create a more effective acceleration and longitudinal dispersion of the fluid flow through the holes. A lower back pressure enables to use less expensive

equipment to push the mass through the die assembly at the required flow rate while achieving thinning of the mass. Furthermore, as resulting from a longitudinal direction of transport of the mass, the liquefying of the mass is carried out in a continuous manner and the residence time is considerably reduced.

5       The circumference of the holes does not appear to be a determining factor and the holes may have any shapes such as circular, square, triangular, polygonal, or other shapes.

10       The number of die plates may be adjusted according to the level of viscosity desired. In a preferred embodiment, there is provided more than one separate die plate positioned in series in a barrel for serial passage of the product mixture through the die plates wherein any die plate  $n$  in the series is capable of lowering the viscosity and/or yield values of the mixture to a level that is further lower than the viscosity and/or yield values achieved by passing of the mixture through die plate  $n-1$  in the series. The number  $n$  of die plates may be of from 1 to 10, preferably 1 to 3.

15       In a preferred aspect of the invention, the mixture is forced through a die assembly comprising at least one die member and on a continuous manner by means of a pressure generating means that exerts a positive pressure upstream the die assembly to positively move the mixture through the holes of the at least one die plate at a sufficient flow rate. The use of a pressure generating means enables a continuous  
20       transport of the mixture while achieving the intended viscosity lowering, therefore considerably reducing the residence time of material in the device. Residence times of less than 5 minutes, even less than 3 minutes of material in the device can be achieved. This configuration also allows to more precise control the back pressure that is required according to the holes configuration of the die plate(s), the number of die  
25       plates, the viscosity reduction, the throughput rate desired and other relevant operational factors.

30       For that, the pressure generating means may be any sort of device adapted to produce a sufficient positive pressure upstream the die assembly of at least 5 bars, more preferably of at least 20 bars. The pressure generated from the pump is partially dependent, amongst other things, on the texture of the refined mass entering the die assembly, its formulation, the section of the holes, in particular, entry section, the number of die plates, temperature and flow rate. In particular, the pressure generating

means may be a gear pump, a lobe pump, a piston pump or an extruder. Satisfactory results have been obtained with a gear pump that can be considered as the preferred embodiment to date.

5 Viscosity of the mass as obtained from the stage of elongational flow may greatly vary from a thick paste to a liquid. Hence, for instance, it may be suitable to deliver a relatively thick mass if morsels are desired in the mass. In any case, it is preferred that at least 80%, even preferably 90%, of the agglomerates be removed from the feed mass as resulting from the elongational flow through the restrictions.

10 In a preferred aspect, the solid ingredients are added and mixed with fat and optionally emulsified in a mixer prior to being pressurized in the pressure means. If milling is carried out dry with little fat or no fat, as in an air classifier, the mixer is required especially for allowing a sufficient amount of fat to be homogeneously added to the mixture before the viscosity reduction by elongational flow can be effectively carried out.

15 The method of the invention may further comprise a final shear mixing carried out after the elongational flow has been carried out through the apertured dies in order to set up the final viscosity of the mixture and complete the addition of fat and/or emulsifiers of the final fat based mass. Therefore, when elongational flow, as previously defined, is carried out before conching, it considerably reduces the peak in  
20 power that is usually observed in the shear mixer or conche which is due to the energy consuming mixing action on the very thick mass at the beginning of the mixing in the conche (during the "loading phase"). A graph illustrating a typical conche water amperage during the stages of conching using a traditional conche is shown for instance in "Industrial Chocolate Manufacture and Use", Edited by Steve Beckett ,  
25 Third edition, Fig. 9.6, Page 161.

Final mixing may be carried out in any conventional mixers such as in an in-line mixer such as a pin mixer or a batch mixer such as a conche or colloid mill.

30 Where the final mixing device is a shear mixer such as a traditional conche, the method of the invention enables a reduction of the conching time for the same final viscosity of the fat based product, or alternatively, provides a lower viscosity for the same conching time, as it removes or, at least significantly reduces, the initial conching phases, known as being the loading phase and the dry conching phase, and



makes the mass denser. Both of these enable bigger subsequent loading and improve throughputs in the shear mixer.

Where the final mixing is carried out in an in-line mixer for the primary purpose of adding fat and/or emulsifiers the method of the invention gives a simplified,  
5 continuous, lower floor area, lower cost alternative to traditional conching of fat based products. Furthermore, reaction flavours that are normally created during conching may also be achieved by other more efficient methods such as by making a chocolate crumb that is a pre-treatment that consists of making an intermediary product useful in the production of milk chocolate products to prevent rancidity and provide special  
10 milk flavours to these products. Such methods are described, for instance, in EP-A-940085 or in European co-pending patent application number 99 200 416.8. Other possible treatments for developing flavours are reactions process such as the liquid milk powder-compounded process in a Petzomat column. Removing of unwanted volatiles can also be carried out more efficiently than by conching by treating the  
15 cocoa mass such by passing the chocolate mass in thin stripping columns as described in "Industrial Chocolate Manufacture and Use", Third edition, Page 104-106. Furthermore, for some products, such as white chocolate or compounds made from cocoa powder, flavour reactions and flavour removal only play a small role and therefore do not require additional flavour related treatments.

20 The initial fat based material that can be liquefied according to the method of the invention includes, more particularly, powdery or pasty mixtures traditionally obtained after refining or milling of sugar solids and/or cocoa solids and/or milk solids with fat in order to reduce the particle size of the solids in the mixture. The fat may include cocoa butter, chocolate substitutes containing direct cocoa butter  
25 replacements, stearines, coconut oil, palm oil, butter or any mixtures thereof. The solids may include cocoa solids, sugar, sugar alcohols, sugar substitutes, milk such as skimmed milk or full cream milk powder, vegetable solids and any combinations thereof. After homogenization and refining the initial fat based material may result in flakes, powder or granules of differing particle size but more preferably of an average  
30 particle size, in particular, of less than 50 microns, even preferably less than 30 microns so that the final material is not gritty in the mouth. The proportion of fat may depend on the product to be liquefied. However, the proportion of fat of the refined mass, before operation in the die assembly, is preferably of from 20 to 35% by

weight. Typically, under 20% fat, the mass is difficult to transform into a paste in the die assembly.

In the method, emulsifiers may be added in small amounts at different stages to help further reduce viscosity such as lecithin, polyglyceryl polyricinoleate (PGPR), ammonium phosphatide or others.

The invention also relates to a device for reducing viscosity of a fat based mixture comprising solids and fat that have been refined to a powdery or pasty mass characterized in that it comprises a die assembly comprising at least one die plate with a plurality of holes and a pressure generating device to exert a pressure on the mixture upstream of the die means to force the fat based mixture through the holes of said die assembly and thereby create an elongational flow effective to achieve breaking up of the agglomerates and intimate interactions of the solids with the fat.

The invention will now be specified with reference to the accompanying drawings. In these drawings:

Fig. 1 a schematic illustration of a side view of the device according to a preferred embodiment of the invention;

Fig. 2 is a cross-section view of the die assembly of the device of Fig. 1.

The device of the invention comprises a pre-mixer 1 in which chocolate flakes are fed into a hopper 10 at one end of the pre-mixer. Fat and emulsifier such as lecithin are fed in the pre-mixer 1 through an inlet 11 and mixed with the chocolate flakes.

The mixture is conveyed by the conveying screw of the pre-mixer into the feed opening of a gear pump 2.

The pre-mixer has two main functions which are a) to mix the flakes with the required amount of fat and emulsifier and b) to feed the gear pump with the mixture in a continuous and steady way. The gear pump 2 compresses the pre-mixture and creates enough pressure to extrude the products through a following dies zone 3, as illustrated in greater details in Fig. 2. The mixture passes through the small holes of several die plates 30, 31, 32, 33 positioned in series in a barrel 38 of the dies assembly 3. The holes have a parallel or tapered configuration with an angle relative to the longitudinal axis of the holes ranging of from about 0 to 85°. The temperature within the stage of elongation flow achieved in the gear pump and die plates can be

controlled, in general of from 30 to 80°C. Some heat is produced by the shearing but additional heat can be provided in order to keep the fat liquid.

The elongational flow created by the serial passage through dies plates liquefies the mixture changing it from a powder to a paste or from a paste having a thick consistency to a paste having a reduced viscosity. The level of elongational flow may be controlled by different factors amongst them is an important variable the addition of the number of die plates to achieve the desired elongational flow for subsequent processing. After the product has been liquefied, the remaining fat and emulsifiers are added to complete the recipe. The mixture is passed into a pin mixer 4 to homogenize it and also introduce additional shearing for further viscosity reduction. More fat and emulsifier can be added via inlet 40 in the pin mixer. The flow rate of the mixture through the plates may typically be of from 1.5 to 100 Kg/min.

The final fat-based liquid product exits the pin mixer by outlet 41 to be further processed as in traditional chocolate manufacturing such as tempering, moulding, extrusion, depositing, injection, enrobing, etc.

In an alternative mode, the pin mixer 4 may be replaced by a batch-type conche for further liquefying and fat and/or emulsifier addition. The elongational flow is preferably carried out at the start of the liquefying process before transfer of the mass into the conche. Suitable conche may be, for instance, a 3-ton Carle Montannari Clover conche or a 6-ton Frisse or Lipp conche. As a result of applying the preliminary elongational flow prior to conching, the paste contains fewer agglomerates and many of the particles are already coated with fat. Hence, by separating the elongational flow and normal shear in two sequential stages, the overall processing time is reduced and ultimate viscosity is set up to the desired level more effectively.

In the present invention the terms "refine" or "refined" refer to the general process of reducing particle size of solids in the fat based mixture by any suitable means such as in a roll refiner, a mill or any other similar apparatus.

The following examples further illustrate the present invention.

**EXAMPLES:****Example 1 - Milk Chocolate**

5

12 parts West African cocoa mass are mixed with 9 parts cocoa butter, 50 parts crystal sugar, 15 parts skimmed milk powder and 5.2 parts anhydrous milk fat, giving the resulting mix a fat content of about 23%. The mix is homogenised for 10 minutes and refined using roller refiners so that 90 % of the particles are smaller than 30 microns, resulting in chocolate flakes (powdery material).

**Example 1.1 - Comparative**

The chocolate flakes are conched using a 10 kg laboratory conche manufactured by Lipp GmbH. 5 part of cocoa butter are added to the 90.5 parts of chocolate flakes, dry conched for 3.5 hrs at 60 degC and at medium rotor speed. After 3.5 hours a further 4 parts of cocoa butter and 0.50 parts of lecithin emulsifier are added and mixed for 30 minutes, giving a final fat content of 30.3%.

The viscosity of the finished chocolate mass is measured using a Haake rotational viscometer and the Casson model is used analyse the data:

Plastic Viscosity PV = 2.3 Pa.s

Yield Value YV = 20.1 Pa

**Example 1.2 - Invention**

25

The 90.5 parts of chocolate flakes are mixed with 3.8 parts of cocoa butter and 0.3 parts of lecithin using a low shear powder mixer. The resulting powder is fed to a 80 mm co-rotating intermeshing twin screw extruder. The extruder is heated to 70 degC, the screw speed is 40 rpm and the screws is made up of conveying elements only. At the end of the extruder screw the powder is extruded through a plate consisting of 17 holes each having a diameter of 2.5 mm with a throughput of 100 kg/hr. The residence time of the product within the extruder and hole plate is less than 2 minutes. A sample

of the resulting mass is taken and the mass is returned to the extruder inlet and processed again through the hole plate. Again, a sample of the extruded mass is taken. In a third trial, the hole plate is changed to a plate containing 80 holes each 1.0 mm. The three samples ( 94.6 parts) are mixed with a further 5.2 parts of Cocoa Butter and 0.2 parts of Lecithin, using a low shear mixer to avoid introduction of shear (giving the same overall composition as used in Example 1). The viscosity of the finished chocolate mass is measured using a Haake rotational viscometer and the Casson model is used to analyse the data:

1st pass

10 Plastic Viscosity PV = 2.9 Pa.s

Yield Value YV = 43.3 Pa

2nd pass

Plastic Viscosity PV = 2.9 Pa.s

Yield Value YV = 37.9 Pa

15 3rd pass

Plastic Viscosity PV = 2.3 Pa.s

Yield Value YV = 27.7 Pa

20 The product made in Example 1.2 shows nearly the same viscosity as the sample made in Example 1.1, even though the throughput in Example 1.2 was significantly higher than in Example 1.1. Furthermore, the effect of the holes plates can be seen by comparing 1st, 2nd and 3rd pass. Due to the low speed of the extruder and the fact that only conveying elements were used it can be assumed that all the liquefaction work was done in the hole plates, the extruder was used only for generating the  
25 necessary pressure.

Example 2 - White Compound

30 Vegetable fat (cocoa butter equivalent, CBE) are mixed with sugar, full cream milk powder, anhydrous milk fat and lecithin so that the resulting mix has a fat content of about 30%. The mix is homogenised for 10 minutes and refined using roller refiners so that 90 % of the particles are smaller than 30 microns, resulting in white flakes.

### Example 2.1 - Comparative

The chocolate flakes are conched using a 3-ton Carle Montanari Clover conche. The  
5 dry conching stage is carried out for 1 hour followed by a 2 hour liquid conching  
step. The final mass has a fat content of 34%, including 0.6% lecithin and 0.2%  
polyglycerolpolyricinoleate. The viscosity of the finished mass is measured using a  
Haake rotational viscometer and the following apparent viscosities were measured:

Apparent Viscosity at  $15 \text{ s}^{-1}$  shear rate = 6.8 Pa.s

10 Apparent Viscosity at  $50 \text{ s}^{-1}$  shear rate = 6.5 Pa.s

### Example 2.2 - Invention

The same flakes as used in Example 2.1 are fed into a low shear blender in which  
15 CBE, lecithin and polyglycerolpolyricinoleate are added to the same overall  
composition as used in Example 2.1. The mix is conveyed into a high pressure gear  
pump which is extruding the mass through a plates having 69 holes each 1.5 mm  
diameter. The throughput of the system is 400 kg/hr, the residence time smaller than 2  
minutes. The viscosity of the finished mass is measured using a Haake rotational

20 viscometer and the following apparent viscosities were measured:

Apparent Viscosity at  $15 \text{ s}^{-1}$  shear rate = 7.3 Pa.s

Apparent Viscosity at  $50 \text{ s}^{-1}$  shear rate = 5.1 Pa.s

The product made in Example 2.2 shows a similar viscosity as the sample made in  
26 Example 2.1, however the residence time to liquefy the flakes is 2 minutes compared  
to three hours in the conventional conching unit. During a consensus tasting of a  
trained chocolate panel, no differences were found between the sample made in  
Example 2.1 and Example 2.2.

### 30 Example 3 - Fat reduction

Milk chocolate refiner flakes of about 26.5 wt. % fat are submitted to an elongational  
flow through a device of the invention and then to normal Bauermeister conche. The

21.JUN.2002 15:33

NESTEC VEVEY PATENTS 021 9242880

NO395

P.20/25

final Casson yield value of the conched mass obtained is 13.6 Pa and the plastic viscosity is 2.8 Pa.s. The same refiner flakes but with 1% less fat are treated by elongational treatment then conching in the same conche at the same temperature and for the same time. The Casson yield value of the conched mass obtained is 7.5 Pa and  
5 the plastic viscosity is 3.6 Pa.s.

**Claims:**

1. A method for lowering the viscosity of a fat based mixture comprising solids and fat that have been previously refined to a powdery or pasty mass characterized in that the powdery or pasty mass is essentially submitted to elongational flow effective as such to provide breaking up of the agglomerates and intimate interactions of the solids with the fat thereby resulting in the coating of the solids with the fat.
2. Method according to claim 1, wherein the predominant elongational flow is achieved by forcing a flow of the fat based mixture through a plurality of flow constrictions positioned in parallel and/or series relative to said flow.
3. Method according to claim 2, wherein the elongational flow is achieved by forcing under pressure and on a continuous manner the powdery or pasty mass through a plurality of holes of at least one die plate.
4. Method according to any of claims 1 to 3, wherein the at least one die plate comprises a plurality of small size holes having a size of from 0.5 to 10 mm.
5. Method according to claim 4, wherein the holes form a tapered, parallel, flared profile or any combinations thereof, as viewed from the inlet to the outlet of the holes.
6. Method according to claim 5, wherein the at least one die plate comprises of from 1 to 200 holes.
7. Method according to any of claims 4 to 6 wherein there is provided at least two separate die plates positioned in series in a barrel for serial passage of the product mixture through the die plates.
8. Method according to any of claims 3 to 7, wherein forcing of the mixture through the at least one die plate is carried out by the use of pressure generating means exerting a positive pressure upstream the die plate.



9. Method according to claim 8, wherein the pressure generating means is a gear pump, a lobe pump, a piston pump or an extruder.
- 5 10. Method according to claim 9, wherein solid ingredients are added and mixed with fat and optionally emulsified in a mixer prior to being pressurized in the pressure generating means.
- 10 11. Method according to any of the preceding claims, wherein the average particle size of the solids of the refined fat based mixture has been reduced to less than 50 microns.
12. Method according to any of the preceding claims, wherein the fat based mixture essentially consists of refined chocolate or chocolate-like compound.
- 15 13. Method according to any of the preceding claims, wherein the elongational flow is carried out at the start of a liquefying process before shearing of the resulting fat based mixture in a shear mixer such as a conche so as to significantly decrease the subsequent shearing time and/or to further reduce the viscosity at the final
- 20 desired level.
14. Method according to claim 13, wherein the final mixing is carried out in an in-line mixer to complete the addition of fat and/or emulsifier.
- 25 15. Method according to claim 13, wherein the final mixing is carried out in a batch type conche.
- 30 16. Device for reducing viscosity of a fat based mixture comprising solids and fat that have been refined to a powdery or pasty mass characterized in that it comprises a die assembly comprising at least one die plate with a plurality of holes and a pressure generating device to exert a pressure on the mixture located upstream of the die assembly to force the powdery or pasty mass through the holes and thereby creates an elongational flow effective to achieve breaking up of the agglomerates and intimate interactions of the solids with the fat.


**Abstract:**

The invention relates to a method for lowering the viscosity of a fat based mixture comprising solids and fat that have been previously refined to a powdery or pasty mass characterized in that the powdery or pasty mass is essentially submitted to elongational flow effective as such to provide breaking up of the agglomerates and intimate interactions of the solids with the fat thereby resulting in a coating of the solids with the fat. The method enables to replace conching in a traditional conche or at least reduce conching time or increase the subsequent loading and throughput of the fat based mass in traditional conches.

**Figure 1**

15

20

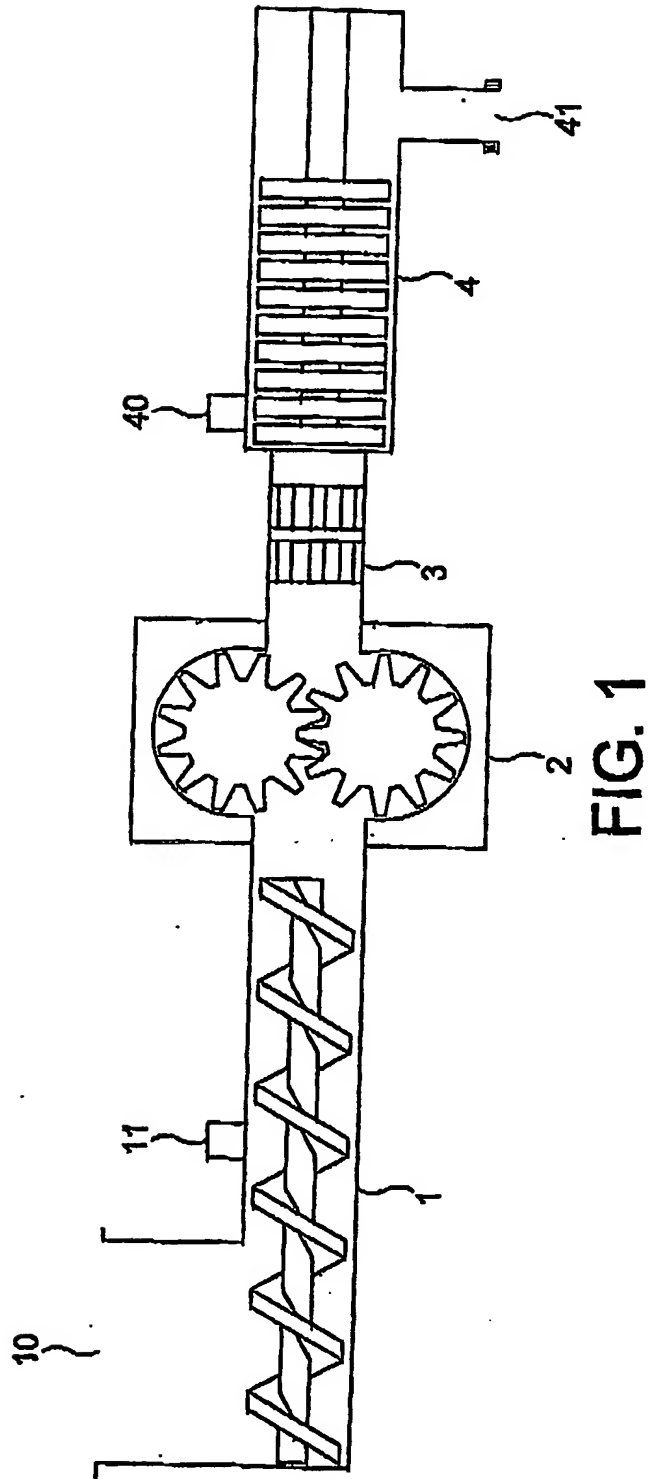

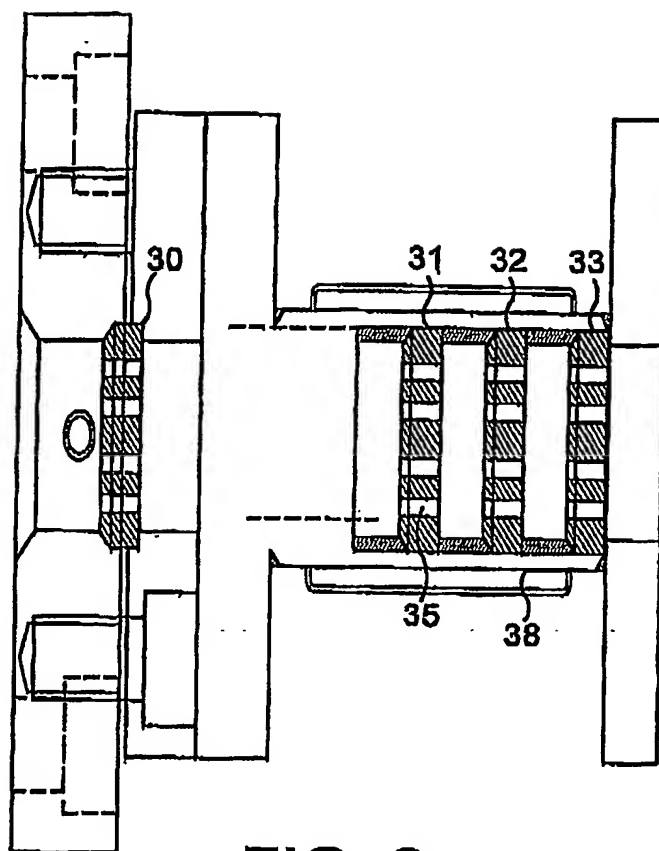


FIG. 2